

**KEEN OVENS
ARE DESIGNED
AND BUILT TO
KEEP YOUR
ELECTRODES
DRY AND
FACTORY
FRESH**



MODEL K-15R

Model K-15 and *Model K-15R

SPECIFICATIONS

Electrode Capacity	15 lbs. (6.8 kg) 18" (45.7 cm) rods
Volts (Specify)	120V AC/DC
Watts	100W
Temperature	100°-300°F (38° - 149°C)
Insulation	1" (2.54 cm)
Interior Dimensions	3.3" (8.38 cm) D × 19" (48.26 cm) H
Net Weight	13 Lbs. (5.9 kg)
Shipping Weight	16 Lbs. (7.3 kg)
Shipping Dimensions	10.5" (22.67 cm) × 9" (22.86 cm) × 22.75" (57.78 cm)

Model K-15R*

*Receptacle Load	120V - 12 Amp
------------------	---------------

Model K-15 W/T

SPECIFICATIONS

Electrode Capacity	15 Lbs. (6.8 kg) 18" (45.7 cm) rods
Volts (Specify)	120V or 240V AC/DC
Watts	150W/150W
Thermostat	Factory preset/Field Adjustable
Temperature	Preset 275°F (135°C) Range 100°-300°F (38° - 149°C)
Insulation	1" (2.54 cm)
Interior Dimensions	3.3"D (8.38 cm) × 19" H (48.26 cm)
Net Weight	13 Lbs. (5.9 kg)
Shipping Weight	16 (7.3 kg)
Shipping Dimensions	10.5" (26.67 cm) × 9" (22.86 cm) × 22.75" (57.78 cm)



MODEL K-15 W/T



MODEL K-50

Model K-50

SPECIFICATIONS

Electrode Capacity	50 Lbs. (22.7 kg) 18" (45.7 cm) rods
Volts*	120V AC/DC
Watts	150W
Thermostat	Factory preset/Field adjustable
Temperature	Preset 275°F (135°C) Range 100°-300°F (38°-149°C)
Insulation	1" (2.54 cm)
Interior Dimensions	6" (15.24 cm) × 6" (15.24 cm) × 19" (48.26 cm)
Net Weight	18 Lbs. (8.16 kg)
Shipping Weight	20 Lbs. (9.07 kg)
Shipping Dimensions	10.5" (26.67 cm) × 9" (22.86 cm) × 22.75" (57.78 cm)

*K-50 240V available. Call for quotation.

MODEL K-450



Model K-450

SPECIFICATIONS

Electrode Capacity	450 Lbs. (204.1 kg) 18" (45.7 cm) rods
Volts*	120V / 240V
Watts	300W / 1200W
Thermostat	Dial adjustable
Temperature	120V: 150°F-275°F (65°-135°C) 240V: 150°-550°F (65°-288°C)
Insulation	2" (5.08 cm)
Interior Dimensions	19.5" (49.53 cm) D x 20" (50.80 cm)
Net Weight	72 Lbs. (32.6 kg)
Shipping Weight	88 Lbs. (39.9 kg)
Shipping Dimensions	26" (66.04 cm) x 28" (71.12 cm) x 26" (66.04 cm)

Stack Kit Available for stacking K-450 ovens two high.
*K-450 480V single-phase available. Call for Quotation.

Model KHT-500

SPECIFICATIONS

Electrode Capacity	475 Lbs (215.46 kg) 18" (45.7 cm) rods
Volts	240V
Watts	3000W
Temperature	0° - 999°F (-18°-555°C)
Controls	Indicating, proportional band temperature controller. Adjustable over temperature control.
Insulation	4" (10.16 cm)
Interior Dimensions	34" (86.36 cm) H x 33" (83.82 cm) W x 27" (65.58 cm) D Interior is fitted with diagonal shelving that allows storage of 50 lb. electrode tins or loose electrodes
Net Weight	203 Lbs (92.08 kg)
Shipping Weight	338 Lbs. (153.32 kg)
Shipping Dimensions	39" (99.06 cm) H x 40.5" (102.87 cm) W x 36" (91.44 cm) D



Model KHT-500

Model KHT-900

Model KHT-1000

SPECIFICATIONS

Electrode Capacity	1000 Lbs. (453.6 kg) 18" (45.7 cm) rods	1500 Lbs. (680.4 kg) 18" (45.7 cm) rods
Volts*	240V	240V
Watts	6000W	6000W
Thermostat	Dial adjustable digital read	Dial adjustable digital read
Temperature	0°-800°F (-18°-426.6°C)	0°-800°F (-18°-426.6°C)
Insulation	4" (10.16 cm)	4" (10.16 cm)
Interior Dimensions	18" (45.72 cm) x 18.5" (46.99 cm) x 36" (91.44 cm)	27.5" (69.85 cm) x 20.5" (52.07 cm) x 40" (101.6 cm)
Net Weight	245 Lbs. (111.4 kg)	400 Lbs. (181.44 kg)
Shipping Weight	260 Lbs. (118 kg)	450 Lbs (204.10 kg)
Shipping Dimensions	34" (86.36 cm) x 34.5" (87.63 cm) x 58" (147.32 cm)	43.5" (110.49 cm) x 36.5" (92.71 cm) x 59" (149.86 cm)



MODEL KHT-900

**MODEL KT-99****Model KT-99****SPECIFICATIONS**

Capacity	36" (91.4 cm) filler Material
Volts (Dual)	120V / 240V
Watts	250W / 1000W
Thermostat	Dial adjustable
Temperature	50°F-250°F (10°-121°C)
Insulation	1" (2.54 cm)
Interior Dimensions	20" (50.80 cm) × 37.5" (95.25 cm) × 47.5" (120.65 cm)
Net Weight	215 Lbs. (97.5 kg)
Shipping Weight	250 Lbs. (113.4 kg)
Shipping Dimensions	29" (73.66 cm) × 46.5" (118.11 cm) × 61.5" (156.21 cm)

**Model
K-900****Model
K-1000****SPECIFICATIONS**

Electrode Capacity	1000 Lbs. (453.6 kg) 18" (45.7 cm) rods	1500 Lbs. (680.4 kg) 18" (45.7 cm) rods
Volts (Specify)	120V / 240V / 480V	120V / 240V / 480V
Watts	3000W / 3000W / 3000W	3000W / 3000W / 3000W
Thermostat	Dial adjustable	Dial adjustable
Temperature	150°F-550°F (65°-288°C)	150°-550°F (65°-288°C)
Insulation	2" (5.08 cm)	2" (5.08 cm)
Interior Dimensions	18" (45.72 cm) × 18.5" (46.99 cm) × 36" (91.44 cm)	27" (68.58 cm) × 20.5" (52.07 cm) × 40" (101.60 cm)
Net Weight	175 Lbs. (79.38 kg)	300 Lbs. (136.08 kg)
Shipping Weight	185 Lbs. (84 kg)	335 Lbs. (151.96 kg)
Shipping Dimensions	30" (76.20 cm) × 30.5" (77.47 cm) × 53" (134.62 cm)	39.5" (100.33 cm) × 32.5" (82.55 cm) × 55" (139.70 cm)

**MODEL K-1000****STORAGE OVENS****Model K-1000 M & T****SPECIFICATIONS**

Capacity	18 12" (30.4 cm) spools
Volts	120V / 240V
Watts	250W / 1000W
Thermostat	Dial adjustable
Temperature	50°-250°F (10°-121°C)
Insulation	2" (5.08 cm)
Interior Dimensions	27.5" (69.85 cm) × 20.5" (52.07 cm) × 40" (101.6 cm)
Net Weight	300 Lbs. (136 kg)
Shipping Weight	335 Lbs. (152 kg)
Shipping Dimensions	39.5" (100.33 cm) × 32.5" (82.55 cm) × 55" (139.7 cm)

**MODEL K-1000 M & T**



MODEL KF-100

Model KF-100

SPECIFICATIONS

Capacity	100 Lbs. (45.5 kg) flux or 4 12" (30.4 cm) spools
Volts (Specify)	120V / 240V
Watts	500W / 500W
Thermostat	Factory preset / Field adjustable
Temperature	Preset 275°F (135°C) Range 100°-300°F (38°-149°C)
Insulation	1" (2.54 cm)
Interior Dimensions	12" (30.48 cm) x 12" (30.48 cm) x 16" (40.64 cm)
Net Weight	48 Lbs. (21.7 kg)
Shipping Weight	64 Lbs. (29 kg)
Shipping Dimensions	21" (53.34 cm) x 21" (53.34 cm) x 26" (66.04 cm)


Model KF-300

SPECIFICATIONS

Capacity	300 Lbs. (136.08 kg) Flux
Volts (Specify)	120V / 240V / 480V
Watts	1000W / 1000W / 1000W
Thermostat	Dial adjustable
Temperature	150°F-550°F (65°-288°C)
Insulation	2" (5.08 cm)
Interior Dimensions	20" (50.80 cm) x 20" (50.80 cm) x 22" (55.88 cm) Sloped bottom
Net Weight	198 Lbs. (89.8 kg)
Shipping Weight	238 Lbs. (107.9 kg)
Shipping Dimensions	34" (86.36 cm) x 32" (81.28 cm) x 51" (129.54 cm)



MODEL KF-300

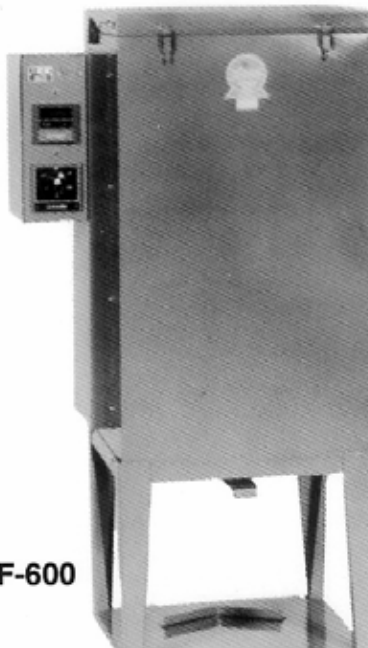

MODEL KHTF-600

Model KHTF-600

SPECIFICATIONS

Capacity	600 Lbs. (272.1 kg) Flux
Volts*	240V
Watts	2000W
Thermostat	Dial adjustable digital read
Temperature	0°-800°F (-18°-426.6°C)
Insulation	4" (10.16 cm)
Interior Dimensions	24" (60.96 cm) x 24" (60.96 cm) x 64" (162.56 cm) Sloped bottom
Net Weight	250 Lbs. (113.4 kg)
Shipping Weight	283 Lbs. (128.3 kg)
Shipping Dimensions	36" (91.44 cm) x 30" (76.20 cm) x 70" (177.80 cm)